

Massachusetts Cultural Resource Information System

Scanned Record Cover Page

Inventory No:	FIT.931
Historic Name:	Lower Rollstone Street Bridge
Common Name:	
Address:	
City/Town:	Fitchburg
Village/Neighborhood:	Fitchburg
Local No:	
Year Constructed:	
Architect(s):	Parker, Charles Edward
Architectural Style(s):	
Use(s):	Abandoned or Vacant; Other Transportation
Significance:	Engineering; Transportation
Area(s):	FIT.E: Nashua River Area
Designation(s):	



The Massachusetts Historical Commission (MHC) has converted this paper record to digital format as part of ongoing projects to scan records of the Inventory of Historic Assets of the Commonwealth and National Register of Historic Places nominations for Massachusetts. Efforts are ongoing and not all inventory or National Register records related to this resource may be available in digital format at this time.

The MACRIS database and scanned files are highly dynamic; new information is added daily and both database records and related scanned files may be updated as new information is incorporated into MHC files. Users should note that there may be a considerable lag time between the receipt of new or updated records by MHC and the appearance of related information in MACRIS. Users should also note that not all source materials for the MACRIS database are made available as scanned images. Users may consult the records, files and maps available in MHC's public research area at its offices at the State Archives Building, 220 Morrissey Boulevard, Boston, open M-F, 9-5.

Users of this digital material acknowledge that they have read and understood the MACRIS Information and Disclaimer (<http://mhc-macris.net/macrisdisclaimer.htm>)

Data available via the MACRIS web interface, and associated scanned files are for information purposes only. THE ACT OF CHECKING THIS DATABASE AND ASSOCIATED SCANNED FILES DOES NOT SUBSTITUTE FOR COMPLIANCE WITH APPLICABLE LOCAL, STATE OR FEDERAL LAWS AND REGULATIONS. IF YOU ARE REPRESENTING A DEVELOPER AND/OR A PROPOSED PROJECT THAT WILL REQUIRE A PERMIT, LICENSE OR FUNDING FROM ANY STATE OR FEDERAL AGENCY YOU MUST SUBMIT A PROJECT NOTIFICATION FORM TO MHC FOR MHC'S REVIEW AND COMMENT. You can obtain a copy of a PNF through the MHC web site (www.sec.state.ma.us/mhc) under the subject heading "MHC Forms."

Commonwealth of Massachusetts
Massachusetts Historical Commission
220 Morrissey Boulevard, Boston, Massachusetts 02125
www.sec.state.ma.us/mhc

This file was accessed on:

Friday, March 07, 2014 at 2:36: AM

MASSACHUSETTS HISTORIC BRIDGE INVENTORY

Municipality: Fitchburg District: 3
 Street name/Rt. #: Lower Rollotone St.
 Over
 Street name/Rt. #: N. Nashua River
 Bridge key #: TWN387001100 Photo ##s: Dist. 3; 3: 22A-28; 43: 3A; 70: 4-13;
 Bridge plan #: F-4-13 71: 6A-12A; 73: 30
 Common/historic name: Lower Rollotone St. Bridge

Current owner: _____

UTM coordinates: _____ AASHTO rating: 326(1-10-86)

 National Register status (insert date) Field rating: _____

Entered: _____ Potential: _____

Eligible: _____ Non-eligible: 5-8-80

③ 2 1

 Date built (source): 1870 (D.H.; Fitchburg 5-E, 9-9-1983)

Date(s) rebuilt (source): _____

Builder (source): National Bridge & Iron Works (plaques/bollards)

Designer (source): _____

 Structural type/materials: 910

pin-connected wrought and cast iron Parker pony truss. 11 panels, w/ curved upper chord. Crossed, paired diagonals and single counters in 9 central panels; paired diagonals only in end panels. Incorporates most of the features claimed in C.H. Parker's 1870 patent (#100,185) including the variable length end panels and the cast-iron "thrust-blocks" or skew-backs. The patented wrought iron verticals w/ cast iron eyes at each end, however, have been modified in the design of the Fitchburg bridge, with much more complex iron castings substituted for the simple, patented cast-iron eyes at each lower chord intermediate panel point.

Overall length: 111' Deck width/layout: 33.8' out-out

Skew: -

Main unit, # spans: 1 lengths: 105'

Approaches, # spans: - lengths: -

Plaque: 4 location: "bollard" castings on inclined end posts

Alterations, unusual features, comments:

Original floor beams and deck system have been replaced.

Welded reinforcing plates added to lower chord plates at both northern "thrust-blocks"

Numerous holes for drainage, utility lines have been punched through the large-block granite rubble abutments.

Field rivets in upper chord splices are actually cone-headed bolts (in all 3 Massachusetts early Parkers)

Iron guardrails quite probably original - they are identical to the railings on D-12-20/W-12-1, the other, 1871, Parker pony truss built by the same company, and no other examples of this railing are currently known. Western railing has probably been relocated from an original location outside of the truss, presumably when Upper Rollotone St. Bridge was built in 1909. Decorative raised bead on cast-iron handrail post vertical faces matches that on the 'bollard' castings on end posts - those 'bollards' are certainly original.

Visual quality (bridge and setting): High____ Average____ Low X

Site integrity: Retained____ Violated X

Describe: Bridge is now dwarfed and partially hidden by 1909 Upper Rollstone St. bridge, built right against the western side of the 1870 bridge as part of a grade crossing elimination project. Former mill buildings E of bridge have been replaced by Fitchburg DPW yard and new General Electric plant; former mill pond west of bridge has been eliminated.

History of bridge and site:

Rollstone Street was a major thoroughfare leading into Fitchburg's Upper Common area from the south at least as early as the mid-19th century. The 1854 map of the town shows a bridge over the N. Nashua here at that time - this structure had probably been built sometime after the disastrous flood of 1850. The present iron superstructure may well be sitting on the abutments of a previous bridge -- the abutments and the trusses do not align exactly, and one of the selling points of the Parker design was the ease (and cheapness) with which a stock Parker truss of standard design could be lengthened or shortened to fit onto existing abutments.

Charles H. Parker was the "Consulting Engineer" for William A. Blodgett and Cadwallader Curry's "National Bridge & Iron Works," the Boston firm which built the Lower Rollstone St. Bridge. Parker's patented truss design of 1870 was notable for its heavy reliance on wrought, rather than the more fragile cast, iron, for elements such as the vertical posts and the built-up upper chord, and for its flexibility (variable length end panels) within what remained a standard design whose elements could be mass-produced. It was a highly successful design for its time, and numerous examples are known to have been built. Few, however, survive today.

Sources: Doris Kirkpatrick, The City and The River, (Fitchburg: Fitchburg Historical Society, 1971) I: 220, 246-7.
 B.H. ✓ Dennis M. Zembala, Elm Street Bridge, (Woodstock VT: Woodstock Nat. Hist. District Comm., 1977).
 Plans No Phone conversation, S.J. Roper w/ Robert Vogel, Smithsonian Institution, 7 Aug. 1986
 RR No Conversation, S.J. Roper, w/ Eric DeLony, HAER, 11 May 1985
 Old BH ✓ John Jacoboni, "The Shocking Story of the Area's Bridges - Three are Closed in Fitchburg," Fitchburg-Leominster Sentinel and Enterprise, 9-9-1983, pp. 1, 12.

Summary statement of significance:

Tied (with L-2-4, the Atherton Bridge in Lancaster) as the oldest known metal truss bridge (out of 195 examples) in the MDPW statewide computerized data base. The oldest of 5 known Parker pony trusses in the data base (the 3 newest examples were built in the 1930s and bear little resemblance to the patented 1870 Parker design). Surviving bridges which closely follow the original Parker patent are extremely rare nationally, and the Fitchburg bridge is of particular interest in that it is the only known surviving example to use paired (rather than single) rod diagonals, and to utilize a complex iron casting at its lower chord panel points, rather than the simpler cast-iron eye which Parker patented.

Statement prepared by: S.J. Roper

Date: 11 Aug. 1986

Field survey by: S.J. Roper, MDPW Historic Bridges Specialist

Date: 22 June 1981

Frances Thompson, Dist. 3 Eng. Aide, 12/79

24 July 1985
6 Aug 1986

BRIDGES PREVIOUSLY REVIEWED BY M.H.C. -- CHANGE IN DETERMINATION RECOMMENDED

Municipality On/Over Br. Dept. No.
 Bridge: Fitchburg Lower Rollstone St./N. Nashua River F-4-13

has previously been reviewed by the Massachusetts Historical Commission and
 was determined to be: Not Eligible
 on 8 May 1980.

After a review of all known bridges of comparable structural type identified
 in the M.D.P.W. statewide computerized database, the M.D.P.W. now recommends
 that the initial determination be changed to: Potentially Eligible

Summary statement of significance:

Tied (w/ L-2-4, the Root pony truss Atherton Bridge in Lancaster) as the oldest known metal truss bridge (out of 195 known examples) in the MDPW data base. Nationally, one of only 4 known surviving examples of the original, 1870-patented Parker truss type (the 3 others: D-12-20/W-12-1 in Dudley/Webster; a privately owned bridge across the North Canal in Lawrence, MA; and the recently "trusssectomized" Elm Street Bridge in Woodstock, VT). Of particular interest in that it is the only one of the four survivors to use pinned rod diagonals, and complex iron castings at its lower chord panel points. Although it has lost its original floorbeams and deck, the Lower Rollstone Street Bridge remains a highly significant example of an important and now extremely rare American truss bridge type.

Statement prepared by: S. J. Roper, MDPW Historic Bridges Specialist

Date: 11 Aug. 1986

United States Patent Office.

CHARLES H. PARKER, OF BOSTON, MASSACHUSETTS.

Letters Patent No. 100,185, dated February 22, 1870.

IMPROVED BRIDGE.

The Schedule referred to in these Letters Patent and making part of the same.

To whom it may concern:

Be it known that I, CHARLES H. PARKER, civil engineer, of Boston, in the county of Suffolk, and State of Massachusetts, have invented certain new and useful Improvements in the Construction of Bridges; and I hereby declare the following to be a full, clear, and exact description of the same, reference being had to the accompanying drawing, in which—

Figure 1 is a side elevation of a bridge embodying my invention.

Figures 2, 3, 4, and 5 are views representing in detail the construction and arrangement of the compression member.

Figures 6, 7, and 8 are like views of the skew-back or thrust-block.

Figure 9 is a view on an enlarged scale of the upper portion of one of the end panels of the structure.

The improvements in the construction of bridges which I desire to secure by Letters Patent are as follows:

First. The first portion of my invention relates to the construction of the end panels or bays of a truss.

In order to make a truss with a curved top member and straight bottom member, and sloping ends that shall be capable of being altered in length within certain limits, without changing the general proportions of the truss in other respects, I have designed the end panels, or in the following manner:

The truss is composed of a curved top member, a straight bottom member, and vertical posts or compression members A, with the usual system of longitudinal diagonal rods or braces.

With the vertical post at each end of the truss I combine the fractional length of the top member and a sloping end, as seen in the drawing, the curved top member being made some fractional length of the end panel or bay, as shown at G, figs. 1 and 9, and the balance of the length of this panel or bay being composed of the sloping end N, which is riveted or otherwise secured to the curved top member G and to its point of support at its other end in any suitable manner. The advantages of this plan are, that in practice if I wish to lengthen or shorten a given length of span within certain limits, I have only to shorten or lengthen the fractional top member of the end bays or panels, or increase or decrease the slope of the ends, without in any way altering or disturbing the patterns or dimensions or proportions of the vertical posts, or of that part of the truss between the end panels; and I am thus enabled in practice to make all patterns, measurements, and plans answer for different lengths of spans within certain limits.

Secondly. The second part of my invention relates to an improvement in the construction of a wrought-iron compression member, capable also of acting with equal efficiency as a tension member. The body of this member is formed of an I section-beam, A, either rolled or built up of plates and angles.

The ends of the I-beam A are cut to receive the cast-iron eyes B B, having shoulders c, which are fitted to and so as to rest on the ends of the flanges of the I-beam and projecting lips D D, which fit on each side of the web of the I-beam.

To join the eye to and virtually make it a part of the I-beam, I employ a strap of wrought iron, E, which passes around the outside and is recessed into the casting B at I, extending down over the lips D D to the web of the I-beam A, to which it is securely riveted.

The strap recessed into the casting, in connection with the projecting lips D D, prevents any sliding of the casting from position.

The hole through the castings for a pin or bolt forms the means of connection of this member with the top and bottom members of a truss.

To form a connection with the bottom chord of a truss and the diagonals of the web, a further modification, shown in figs. 2, 3, and 4, is introduced into the lower eye. This consists in casting into the eye a slot, S, and cutting into the encircling strap E a similar slot, and then placing in this slot the eyes of the diagonals, so that by the common bolt all are held in place. By this construction I make a member which is effective in resisting both compression and tension, and is also capable of resisting effectually any lateral motion.

Thirdly. The third portion of my invention relates to an improved block or skew-back, which is used in the end panels or bays. The general form of this block is shown in figs. 6, 7, and 8. Along each side and around the end H is a recess, K, to receive the bar L, which passes completely around the thrust-block, and terminates at the ends in eyes or any equivalent instrumentalities to fasten to the chord-bars of the bridge. To form the connection with the sloping end N of the arch or top member G, the block projects into said ends. The thrust of this top member is received by a shoulder, O, cast upon the block and the upper edges of the encircling strap L.

To give additional lateral stiffness, and to more thoroughly join to the block the top member or arch, I introduce the plates P P recessed into the block, and under the encircling strap L and under the side plates of the arch or top member, the whole being fastened together by bolts or rivets R R, or any equivalent, passing through the encircling strap L, the plates P, into the block, and through the side plates of the arch

or top member G, the plate P, and into the block; and also with bolts X, or any equivalent fastening, through the top plate of the arch or top member into the block, thus binding the whole together securely. The advantages of this are, that the thrusts and pulls of the respective top and bottom members of a truss are resisted by the block, which receives from these two members only strains of compression through the medium of the encircling strap L; and the bolts, rivets, or any equivalent used to fasten said members to the block, are not called upon to resist the direct strains from the said top and bottom members.

What I claim as new, and desire to secure by Letters Patent, is—

1. A truss having its vertical posts or compression members fractional lengths of the curved top member, and sloping ends combined in the end panels or bays, substantially in the manner and for the purpose specified.

2. A compression member of a truss, constructed in the manner and for the purposes specified.

3. The cast-iron eye or end of the compression member of a truss, constructed with lips to fit the

web of the beam, shoulders to fit upon the flanges of the beam, and a recess to receive the encircling strap E, in the manner and for the purposes specified.

4. The thrust-block or skew-back, constructed in the manner and for the purposes specified.

5. The encircling bar or strap L, used in connection with the thrust-block, so as to hold the chord-bars of the bridge, and at the same time to partially receive the thrust of the top member of the truss, in the manner and for the purposes specified.

6. The plate P, used in the manner and for the purposes specified.

7. The combination of the top and bottom members of a truss with the thrust-block, its encircling bar or strap, and the stiffening-plate P, under the arrangement shown and described.

In testimony whereof, I have signed my name to this specification before two subscribing witnesses.

CHAS. H. PARKER.

Witnesses:





THOMAS G. BANKS,
CADWALLADER CURRY.

C.H. Parker,

Truss Bridge.

No. 100,185.


Patented Feb. 22. 1870

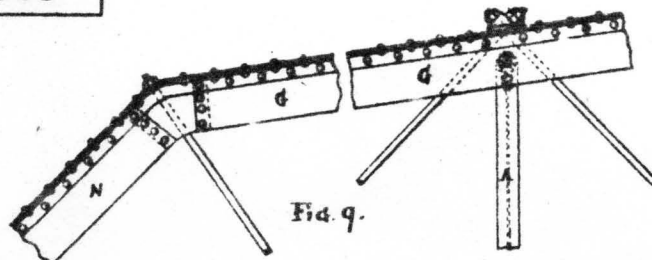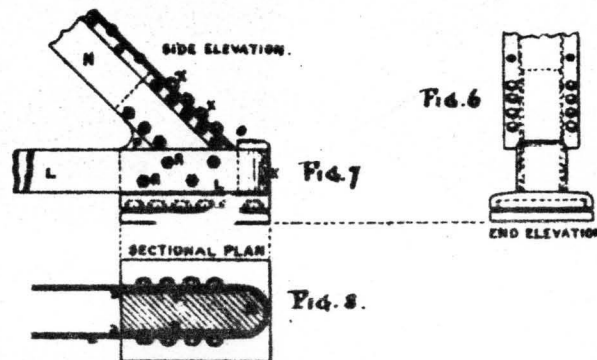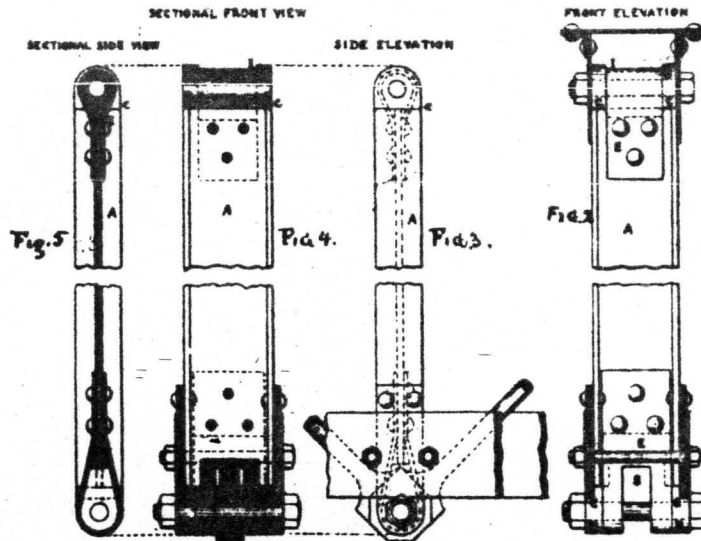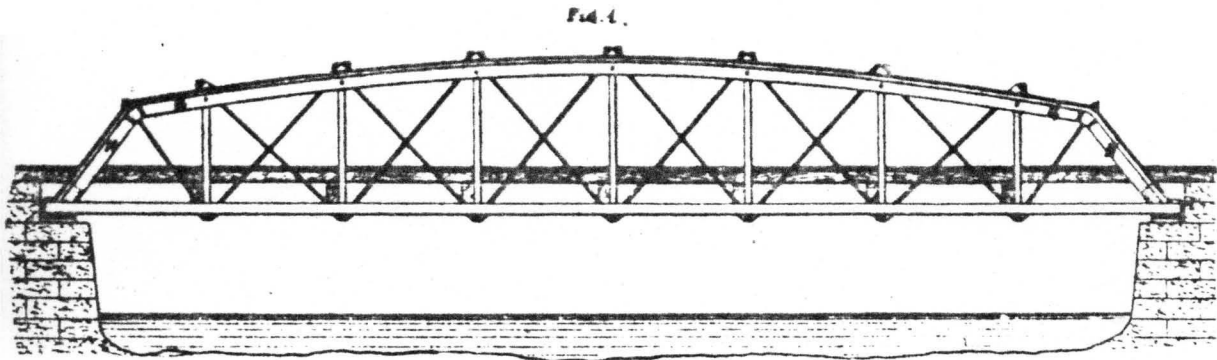

Charles H. Parker
by his attorney
A. H. Little

WITNESSES.

Wm. H. Baker
Wm. H. Baker

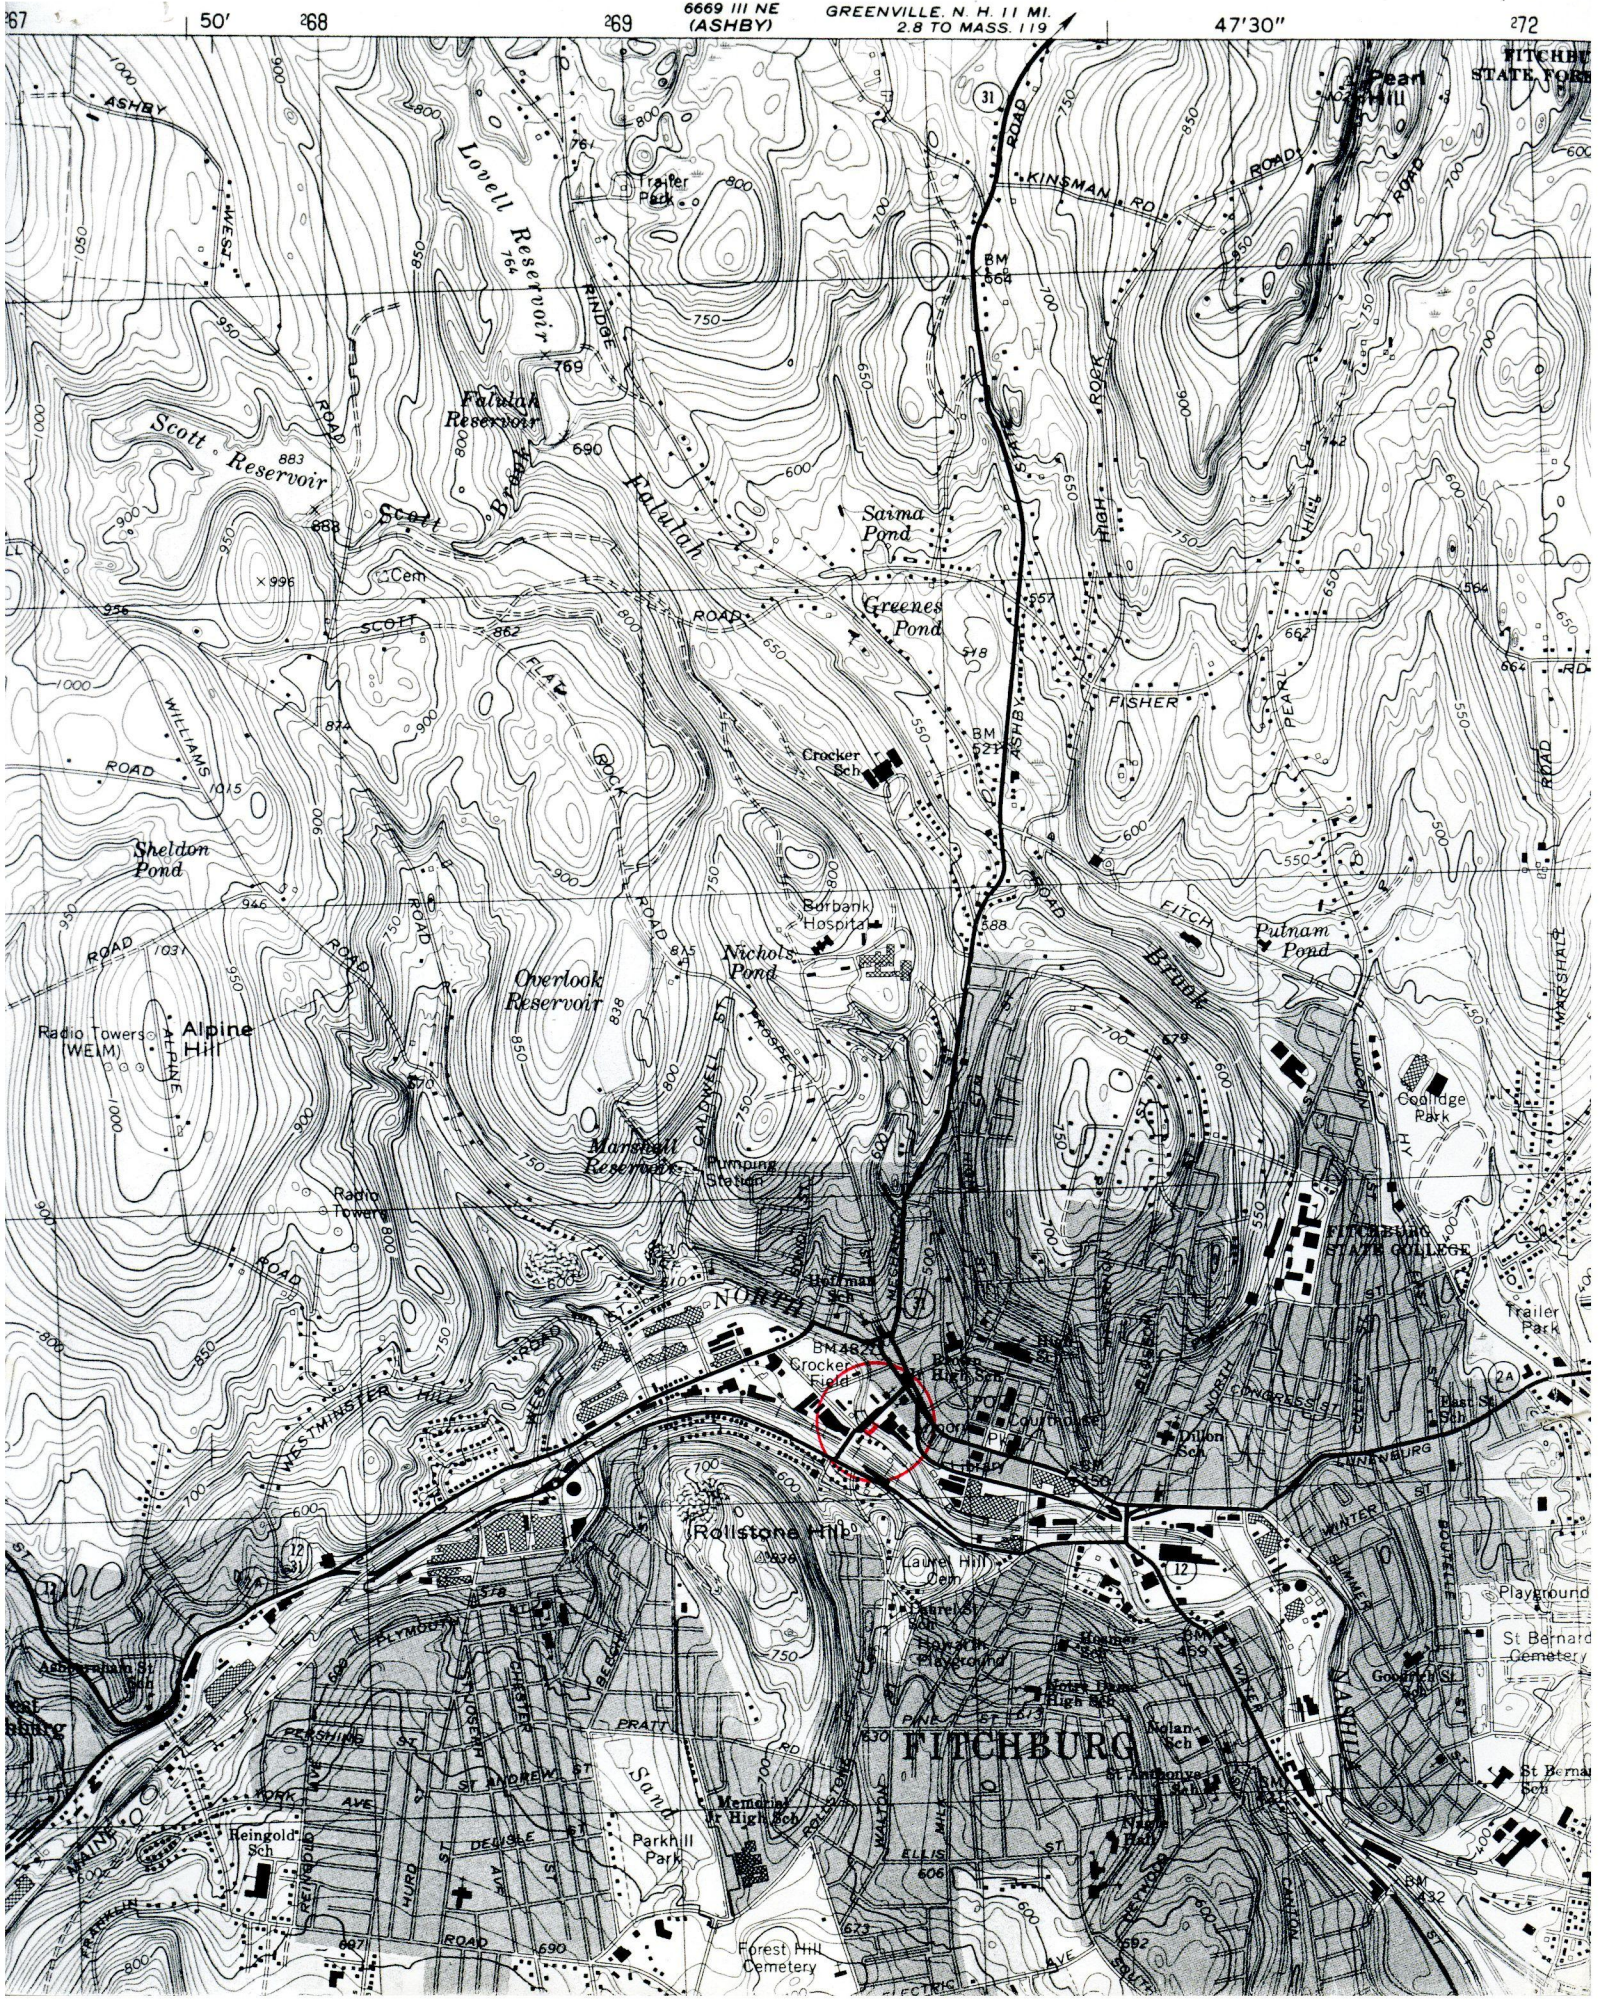



ca. 1980



ca. 1980




FROM SE

6/22/1984



EASTERN TRUSS FROM SW

6/22/1984

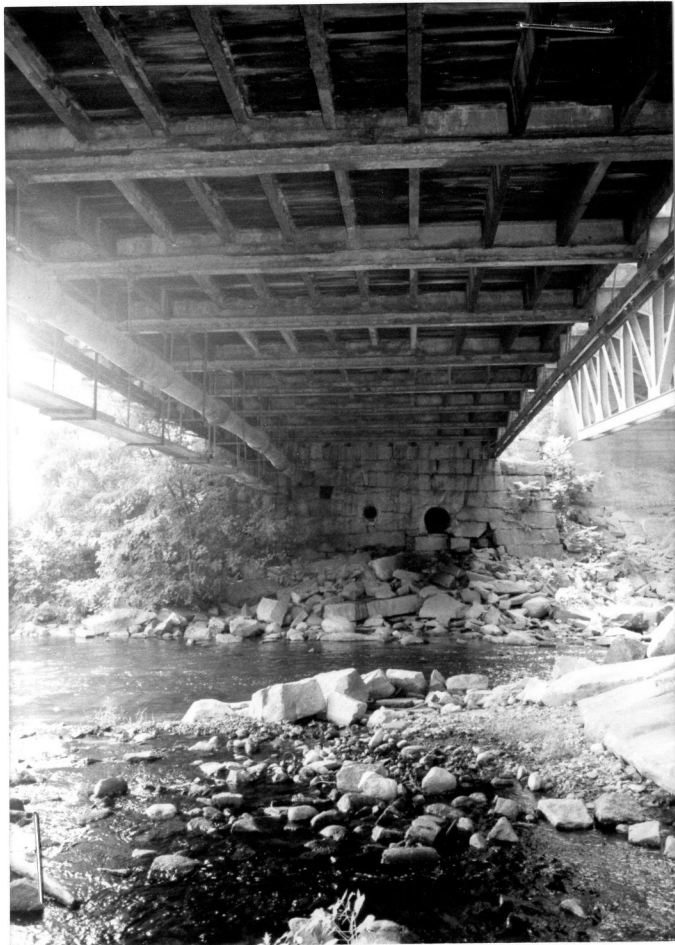

FROM N ABUTMENT LOOKING S
(WITH F-4-12 ON RIGHT)



N ABUTMENT FROM S



S END, WESTERN TRUSS

8/6/1986



NN END PANEL POINT, ETC

8/6/86




NORTHERN END, EASTERN TRUSS

6/22/1984



NW END, PANEL POINT

8/6/86

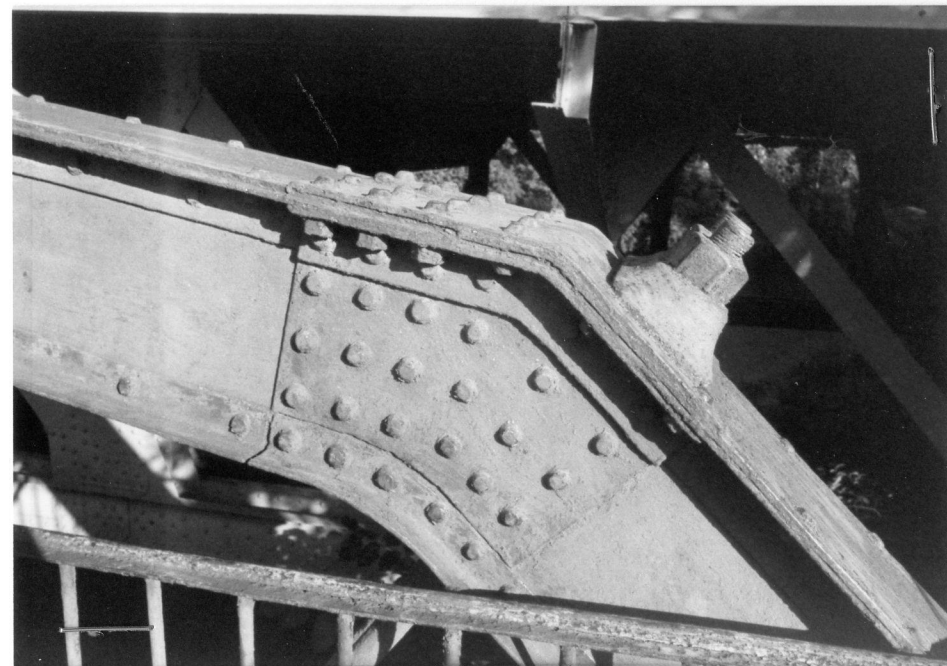

W TRUSS, NORTHERN HIP, SITOWING "BOLTED" SPLICE

8/13/1986



ALL: WESTERN TRUSS, INTERMEDIATE
LOWER PANEL POINT (3/6/1986)





WESTERN TRUSS, INTERMEDIATE
LOWER PANEL POINT



W TRUSS, LOWER CHORD, FROM S




EASTERN TRUSS, LOWER
INTERMEDIATE PANEL POINT,
FROM BELOW

8-6-1986



PATENTED COMPRESSION MEMBER,
LOOKING UP INSIDE UPPER
CHORD 6/22/1984

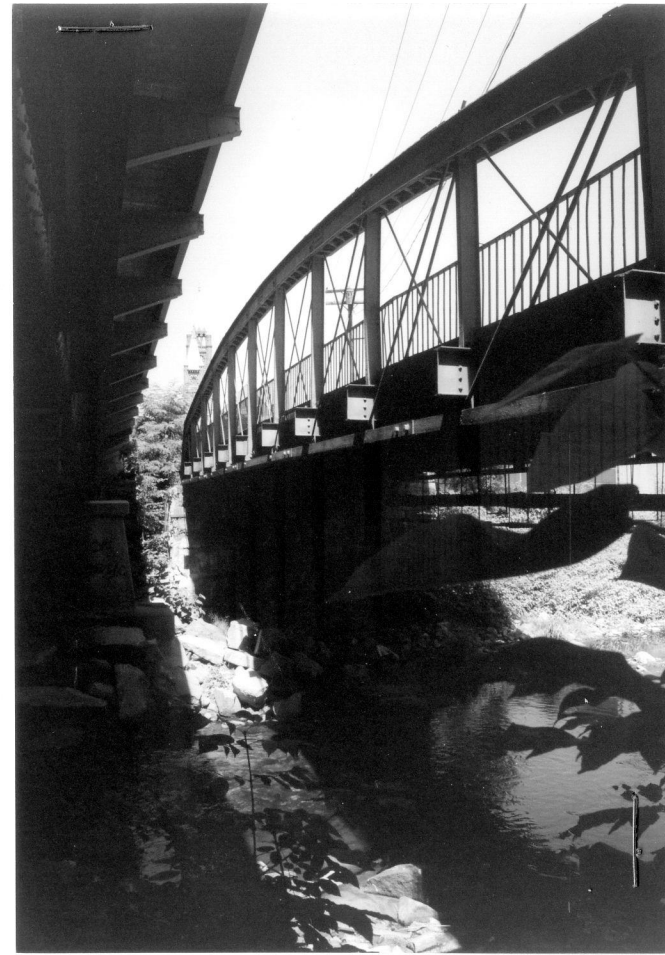

NW TRUSS, FROM SW (7-24-1985)



3 END POST, W RAILING
8-6-86



WESTERN RAILING, WITH F-412
IN BACKGROUND 8-6-86



BOLLARD/PLAQUE ABOVE
SKEWBACK, 3 END OF E
TRUSS 6/22/1984

DETERMINATION OF ELIGIBILITY (MHC OPINION)

TO: BetsyRETURN TO REVIEWER BY _____
(DATE)FROM: D. SmithDATE: 3/20/87TOWN: FitchburgPROPERTY: F-4-13 Lower Rollstone St./North Nashua River
(NAME AND ADDRESS)

1. Does this property meet the criteria for NR eligibility?

☒ YES☐ NO

A. Criteria

- a. events
- b. lives
- c. characteristics
- d. information

B. Local _____ State _____ National ☒

2. Statement of Significance: OR Why not eligible?

National Significance - one of 4 surviving
examples of Parkers 1870 patented truss
(pony)

* MHC incorrectly determined not elig. 5/8/80

☐ DOE LETTER WRITTEN

FILED IN ER FILE _____

(DATE)

DETERMINATION OF ELIGIBILITY (MHC OPINION)

TO: _____

RETURN TO REVIEWER BY _____
(DATE)FROM: ETDDATE: 5/6/80TOWN: FitchburgPROPERTY: Rollstone St. bridge (Nashua River)
(NAME AND ADDRESS)

1. Does this property meet the criteria for NR eligibility?

☐ YES☒ NO

A. Criteria

- a. events
- b. lives
- c. characteristics
- d. information

B. Local _____ State _____ National _____

2. Statement of Significance: OR Why not eligible?

Fairly common Parker Pony Truss

☐ DOE LETTER WRITTEN

FILED IN ER FILE _____

(DATE)



The Commonwealth of Massachusetts

Office of the Secretary of State
Michael Joseph Connolly, Secretary

Massachusetts Historical Commission

Valerie A. Talmage

Executive Director

State Historic Preservation Officer

April 2, 1987

Mr. James A. Walsh
Division Administrator
Federal Highway Administration
Transportation Systems Center
55 Broadway - 10th Floor
Cambridge, MA 02142

ATTN: Mr. Hiram Pearlman

RE: Parker/Camelback Trusses - National Register Eligibility

Dear Mr. Walsh:

The Massachusetts Historical Commission staff has reviewed the historic bridge inventory forms prepared by the Massachusetts Department of Public Works. The MHC concurs with the preliminary findings of the MDPW that the following bridges appear to meet the criteria for listing in the National Register of Historic Places.

Haverhill H-12--6 Railroad Ave. over Merrimack River

This 1906 Parker through truss has been previously reviewed by the MHC and was determined eligible for the National Register of Historic Places. This 1906 bridge is the oldest known multi-span Parker through truss.

Dudley/Webster D-12-20/W-12-1 North Main St. over French River

This 1871 Parker pony truss is one of the four known surviving early Parker patent bridges in the United States. This bridge has all of Parker's patented features. It is also one of four oldest metal truss bridges in Massachusetts.

CHANGING DETERMINATION TO POTENTIALLY ELIGIBLE

Fitchburg F-4-13 Lower Rollstone St. over North Nashua River

1870 pin connected wrought and cast iron Parker pony truss--This bridge and L-2-4 are the oldest known metal truss bridges in Massachusetts.

Nationally, one of four known surviving examples of the original Parker's patented features.

80 Boylston Street, Boston, Massachusetts 02116 (617) 727-8470

The MHC disagrees with the preliminary finding of the MDPW that the following bridge does not appear to meet criteria for listing in the National Register of Historic Places.

Somerville S-17-22 McGrath Highway over Boston & Maine RR

This 1926 camelback through truss is the only known camelback design in Massachusetts. The camelback truss is classified by HAER as a different type than the Parker truss. Notwithstanding the replacement of the upper lateral system and the deck, the trusses are basically intact.

The following bridges do not appear to meet National Register criteria.

Great Barrington G-11-66 Cottage St. over Housatonic River


Great Barrington G-11-14 US-7 over Housatonic River

Ludlow/Springfield L-16-16/S-24-1 West St./River St. over Chicopee River

North Adams N-14-16 State-2 over Hoosic River

If you have any further questions, please feel free to contact William Smith at this office.

Sincerely,



Valerie A. Talmage
Executive Director
State Historic Preservation Officer
Massachusetts Historical Commission

cc: Mr. Frank Bracaglia, MDPW

VAT/WS/dr

(Lower) Rollstone Street Bridge
Spanning the Nashua River on Rollstone Street
Fitchburg
Worcester County
Massachusetts

HAER No. MA-102

PHOTOGRAPHS
WRITTEN HISTORICAL AND DESCRIPTIVE DATA

Historic American Engineering Record
National Park Service
Department of the Interior
Washington, DC 20013-7127

HISTORIC AMERICAN ENGINEERING RECORD

(LOWER) ROLLSTONE STREET BRIDGE
HAER No. MA-102

Location: Spanning the Nashua River on Rollstone Street, City of Fitchburg, Worcester County, Massachusetts
UTM: Fitchburg, Mass., Quad. 19/269660/4718250

Date of Construction: 1870

Structural Type: Wrought- and cast-iron Parker pony truss

Engineer: Unknown; design based on 1870 patent by Charles H. Parker

Fabricator/
Builder: National Bridge & Iron Works, Boston, Massachusetts

Owner: City of Fitchburg, Massachusetts

Previous Use: Vehicular and pedestrian bridge

Present Use: Barricaded and abandoned, 1980

Significance: The (Lower) Rollstone Street Bridge is one of only five known surviving Parker patent trusses in the United States, and the oldest of the three located in Massachusetts. It is also one of the two oldest known metal truss bridges in the state. The design is based on Charles Parker's 1870 patent for a truss bridge that was capable of being altered in length without changing the general proportion of the truss in other respects. The bridge incorporates most of the features claimed in Parker's patent, and is a very early example of this significant bridge type, which was one of the first to allow mass-production of interchangeable parts, and illustrates the spread of iron bridge technology from railroads to highways. The bridge fabricator, National Bridge & Iron Works, was a significant New England bridge-building company in the late-nineteenth century.

Project Information: Documentation of the (Lower) Rollstone Street Bridge is part of the Massachusetts Historic Bridge Recording Project, conducted during the summer of 1990 under the co-sponsorship of HABS/HAER and the Massachusetts Department of Public Works, in cooperation with the Massachusetts Historical Commission.

Lola Bennett, HAER Historian, August 1990

(LOWER) ROLLSTONE STREET BRIDGE
HAER No. MA-102
(page 2)

Description

The (Lower) Rollstone Street Bridge is a single-span, 111-foot, pin-connected, wrought- and cast-iron Parker pony truss. The polygonal upper chord, comprised of straight built-up sections, appears as an upward curve in elevation, and rises to a height of 12'-9" above the lower chord, at the center of the truss. This upper chord, with inclined endposts, is built up of three plates and four angles. The bottom chord is comprised of two pairs of parallel bars (approximately $\frac{3}{4}$ "x6"), running between the inclined endposts. The upper and lower chords of each truss are connected by a series of ten I-section, wrought-iron verticals (8"x4"), decreasing in length from the middle of the truss outward toward the ends. Each of the verticals is connected to the upper and lower chords with pins. Within each panel framed by the verticals, are crossed diagonal tension members. The diagonals angling up toward the ends of the bridge are paired, 2"-diameter rods, while the counters angling down toward the ends are single, 1 $\frac{1}{4}$ "-diameter rods. At the upper end, the diagonals pass through the upper chord and cast-iron skewbacks, where they are secured with nuts; at the lower end, each diagonal has an eye, and is secured to the vertical member with a single bolt. The counter-diagonals, however, are threaded at both ends; the lower end passes through the casting which forms the lower panel point, and is secured against the casting with a hex nut. The original floor system has been replaced with steel floor beams (6 $\frac{1}{2}$ "x18") and a mixture of steel and timber stringers. This floor system supports a timber deck, 29' wide, that has been paved with asphalt. There is a sidewalk, with a wood plank deck and an iron railing on the east side of the bridge--the one on the west side has been removed, and the railing is now on the inside of the truss. The inclined end posts terminate at cast-iron thrust blocks resting on granite rubble abutments. At both portals, the inclined endposts support ornate cast-iron bollards, with the inscription: "National Bridge & Iron Works, Boston, Parker Patent," on their faces. (See Figure 1 and field photos.) The design of this bridge incorporates the patent's featured segmental top chord with a sloping end panel which allowed the length of the bridge to be changed to fit a given site, while all the other parts could be mass-produced. The adjustable span length was a particular advantage at sites where the bridge would replace an earlier bridge, and would need to fit the existing abutments, as was the case with the Rollstone Street Bridge. The bridge also demonstrates Parker's attempt to eliminate the use of cast iron in favor of wrought iron for both tension and compression members--although cast iron was used for the skewbacks, the eyes at either end of the verticals, and the ornamental bollards. The bridge deviates from Parker's patent somewhat in the lower chord connections, where pins were used rather than the clamp system described in the patent and found in other Parker trusses, such as the North Village Bridge at Dudley/Webster (HAER No. MA-99).

Fitchburg

Situated in the northeastern part of the County of Worcester, Massachusetts, Fitchburg was a flourishing manufacturing community in the mid- to late-nineteenth century. The most significant geographical feature is the Nashua River, which flows through the city from west to east, taking a

(LOWER) ROLLSTONE STREET BRIDGE
HAER No. MA-102
(page 3)

northerly arc through the downtown area. Although in the early days, the settlement experienced numerous setbacks due to floods, the river was probably the single most important factor which contributed to the city's eventual industrial success. A description of Fitchburg from 1889 said it this way:

Fitchburg is pre-eminently a busy and thriving city, and probably no other place of its size can boast of a greater diversity of industries. The little stream running through the town was a source of great annoyance to the early settlers. The spring floods carried away their bridges, and the river was considered a nuisance and probable bar to the growth of the town. But coming years showed the folly of these fears. Dams were constructed, the water controlled, and manufacturers on a small scale began to locate on the banks of the formerly detested stream. Thus was a seeming curse turned into an evident blessing, for from those few mills have sprung the present great manufacturing concerns located here.¹

About forty families lived in Fitchburg when it was incorporated in 1764, and there was only one mill--a saw and grist mill--located there at that time.² By the year 1800, the population had increased to 1390, and shortly thereafter, a cotton factory and a paper mill were established as the town's first industries.³ Within fifty years, "there were nearly one hundred large manufacturing concerns in town and the population had increased to 11,260."⁴

Bridging the Nashua

A map from 1830 indicates that at that date, there were at least six bridges along the length of the Nashua River in Fitchburg, four of them in the center of town. (See Figure 2.) One of these bridges, adjacent to the mill pond at the Fitchburg Woolen Mill, was on the main road leading into town from the Albany-Boston Mail Road to the south. By the late 1840s, this road, originally called the "South Road," had become known as Rollstone Street. It was named for Rollstone Hill, a rocky hill rising 300 feet, to the immediate southwest of the town center. (See Figure 3.)

In 1849 the town paid \$1050 to the firm of Stone & Harris of Springfield, for a new bridge on Rollstone Street.⁵ This bridge, described as a "wooden truss bridge," in a later annual report⁶, managed to survive the flood of 1850, but was seriously damaged in the flood of 1869. The Fitchburg Sentinel reported:

One of the most severe rain storms occurred on Monday last, that has taken place since Noah's time. The consequence was a sudden and unprecedented rise of water in the rivers and brooks through all the Eastern States. ...The streets and roads in this town were badly washed, and in many places rendered impassable. All, or nearly all the bridges on roads leading to the neighboring towns were more or less damaged, and some of them entirely ruined. All the factories, mills and shops on the river were impaired to a greater or less extent.⁷

(LOWER) ROLLSTONE STREET BRIDGE
HAER No. MA-102
(page 4)

Rollstone Street Bridge

Shortly after the flood, the Rollstone Street Bridge was declared unsafe, and propped up to keep it open. The town selectmen began making arrangements for its reconstruction. At the same time, they decided to widen Rollstone Street, which necessitated building new abutments and retaining walls. This work was done by the local firm of A. Frost and Company, for the sum of \$5,047.61.⁸ Plans and estimates for the bridge were received from several companies, and the contract was awarded to National Bridge and Iron Works of Boston. The selectmen, being pleased with the plans for the bridge, "and further believing iron to be preferable to any wooden structure," decided to erect another similar bridge on River Road, near the Pulp Mill.⁹ The newspaper reported:

We understand that both of these bridges are to be built of iron. The former will be a single span iron structure of about 100 feet span and 40 feet in width. The cost of the iron work will be about \$7000. The bridge near the pulp mill is to be of similar character, having a span, however, some ten feet less in length. This style of bridge seems much better adapted to resist the floods than those built of wood or stone."¹⁰

The Rollstone Street Bridge was erected during the fall of 1870, at a total cost of \$15,161.33. Of this amount, Blodgett & Curry, proprietors of National Bridge and Iron Works, received \$7,500 for an "iron bridge."¹¹ In the annual report for that year, the selectmen said:

We have no hesitation in saying we consider the work given us is of the first order, combining all the essential requisites of a bridge, and we believe cannot fail eventually to satisfy all our people.¹²(See Figure 4.)

A few years later, in 1879, the south abutment had to be repaired. The abutments were actually resting on top of the woodwork of the Fitchburg Woolen Mill dam, and when the wood decayed, the abutment settled and cracked. Repairs were made by digging below the level of the dam, and bracing up the abutment with stone.¹³ Apparently, that was the biggest problem encountered with the bridge during its expected lifespan. Every few years, the bridge received minor maintenance, in the form of new paint and new planking on the deck.

Between 1909 and 1910, the city built a steel bridge, next to and slightly above, the old Parker truss bridge on Rollstone Street, as part of a grade crossing elimination project.(See Figures 5 and 6.) The lower bridge is now dwarfed and partially hidden by the upper bridge, which also carries all of the traffic, since the lower bridge was closed to vehicular traffic in 1980. The pond and mill buildings are gone now, and in their place is the city's Department of Public Works yard at the east end of the bridge. In recent years, there has been much discussion regarding the importance of a bridge at that point to provide easy access to the yard. The upper deck of the bridge was rebuilt in 1981, but the bridge was still determined unstable

(LOWER) ROLLSTONE STREET BRIDGE
HAER No. MA-102
(page 5)

for the heavy DPW trucks. In 1985, the city contracted for a replacement structure, but work was halted in 1987, when the state stepped in and announced that the project could not be funded with federal money until the Section 106 review process was completed.¹⁴ The project is currently on hold while the city and state study the alternatives and come to some agreement on the matter.

C.H. Parker and the National Bridge & Iron Works

Charles Henry Parker was born in Ashburnham, Massachusetts in 1842. As a young man, Parker chose a career in mechanical engineering, and entered the employ of J.B. Parker & Company, as a designer of machinery for textile and shoe manufacturers. A few years later, he began working with motive power applications, under the employ of J.R. Robinson in Boston. He also did some experimental work for the Shaw Hot Air Engine Company.

In 1867 Parker established the "Solid Lever Bridge Company" of Boston, specializing in the construction of "iron-truss cantilevers with web members arranged as in the Warren truss," although it is unclear as to whether any of these bridges were actually built.¹⁵ Within a short time, this company was succeeded by the National Bridge & Iron Works, under the proprietorship of William A. Blodgett, formerly of the Blodgett & White Metal and Steel Company, and Cadwalader Curry, of the Metallic Compression Casting Company. Charles Parker was employed as a consulting engineer. According to its advertisements, National Bridge & Iron Works, contracted for "Building and Erecting Wrought-Iron Railway and Highway Bridges and Roof Trusses." (See Figure 7.) This firm was just one of the many companies which grew out of the iron bridge technology pioneered by the railroads--companies which saw the potential of applying these same technologies to vehicular bridges.

In 1870 Parker patented a wrought iron truss bridge, "with a curved top member and straight bottom member, and sloping ends that shall be capable of being altered in length within certain limits, without changing the general proportions of the truss in other respects."¹⁶ (See Appendix A.) In other words, the end panels could be lengthened or shortened, while the remaining parts could be mass-produced from the same patterns. This feature had particular relevance at sites where the span length was pre-determined by existing abutments, as in the case of the Rollstone Street Bridge. Another important feature of Parker's patent was the extensive use of wrought iron for both tension and compression members. In early iron bridge designs, cast iron tension members had historically been the weakest elements. Wrought iron, which was known to be a much stronger material in tension, was also much more expensive to produce. Parker's attempt to eliminate cast iron from the large structural members, while using it for the non-structural members, such as the skew backs, the eyes at either end of the verticals, and the ornamental bollards, demonstrates that this was a transitional period in bridge technology, where the emphasis was placed on achieving a balance between cost-effectiveness, strength, and aesthetics.


Parker's patent turned out to be a veritable gold mine for National Bridge & Iron Works. As with most early bridge-building companies, National Bridge & Iron Works chose to work with a standard design which could be easily mass-produced and erected. Pinned connections helped make this possible, and

(LOWER) ROLLSTONE STREET BRIDGE
HAER No. MA-102
(page 6)

Parker's design for mass-produced members even more so. "A successful company like National Bridge & Iron owed its superiority to the fact that its designs reduced the costs of production and hence the selling price."¹⁷ Advertising literature indicates that Parker's truss design was in production for some time prior to his receiving a patent for it. The company used Parker's design quite extensively, although few of these bridges have survived to the present. The (Lower) Rollstone Street Bridge is one of only five known surviving Parker patent truss in the United States. (See HAER Nos. MA-99, VT-3, and VT-13.)


National Bridge & Iron Works was a significant New England bridge-building company in the late nineteenth century. Among their most important engineering contracts were: the bridges over the Merrimack at Lowell, Haverhill and Tyngsboro, the iron roof of the train house of the Boston & Providence depot, the Boston & Lowell depot, the Museum of Fine Arts, the Boston Post Office and Treasury Building, and the iron work of the Providence City Hall. The company was also engaged in the erection of oil refineries, pipe lines, mill roofs and blast-furnace works.¹⁸


National Bridge & Iron Works lasted only seven years, and during that time, underwent numerous changes in its internal structure and management. In 1873 Blodgett left the company, and was succeeded by Parker as proprietor. The following year, Curry left the company, and was succeeded by Carey B. Dopp of New York. In 1874 the company was listed in directories as C.H. Parker & Co., trading as National Bridge & Iron Works. During Parker's tenure at National Bridge, over 150 bridges are said to have been produced,¹⁹ but it is uncertain how many of these were Parker's design, and how many conformed to his patent. National Bridge & Iron Works folded in 1876, and was succeeded, in 1877, by Boston Bridge Works, under the direction of D.H. Andrews. (See HAER Report MA-92.) Parker went on to head the firm of Parker, Field & Mitchell, which was involved in the iron industries. He later worked for the Charles River Iron Works, of Cambridgeport, "designing, constructing, and erecting mining machinery, hoisting engines, and power plants."²⁰ Most of his later work seems to have been principally concerned with the production of machinery and manufacturing plants. Charles Henry Parker died August 31, 1897, at the age of 55.

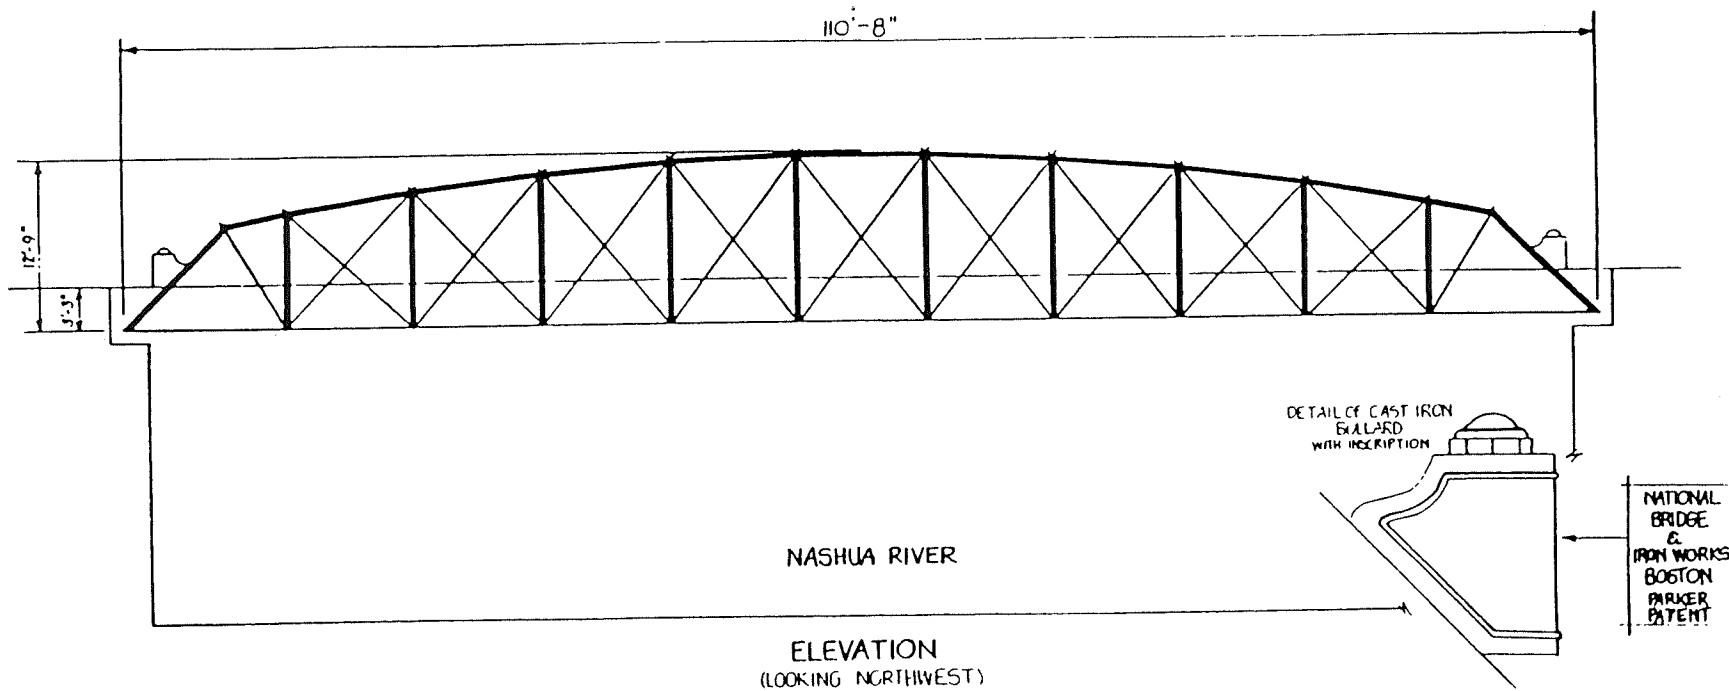

LOWER ROLLSTONE STREET BRIDGE
 SPANNING NASHUA RIVER ON ROLLSTONE STREET
 FITCHBURG, MASSACHUSETTS
 MEASURED AND DRAWN BY LOLA BENNETT AND PAUL MCCRETTI, AUGUST 1990

Figure 1. Elevation of Rollstone Street Bridge.



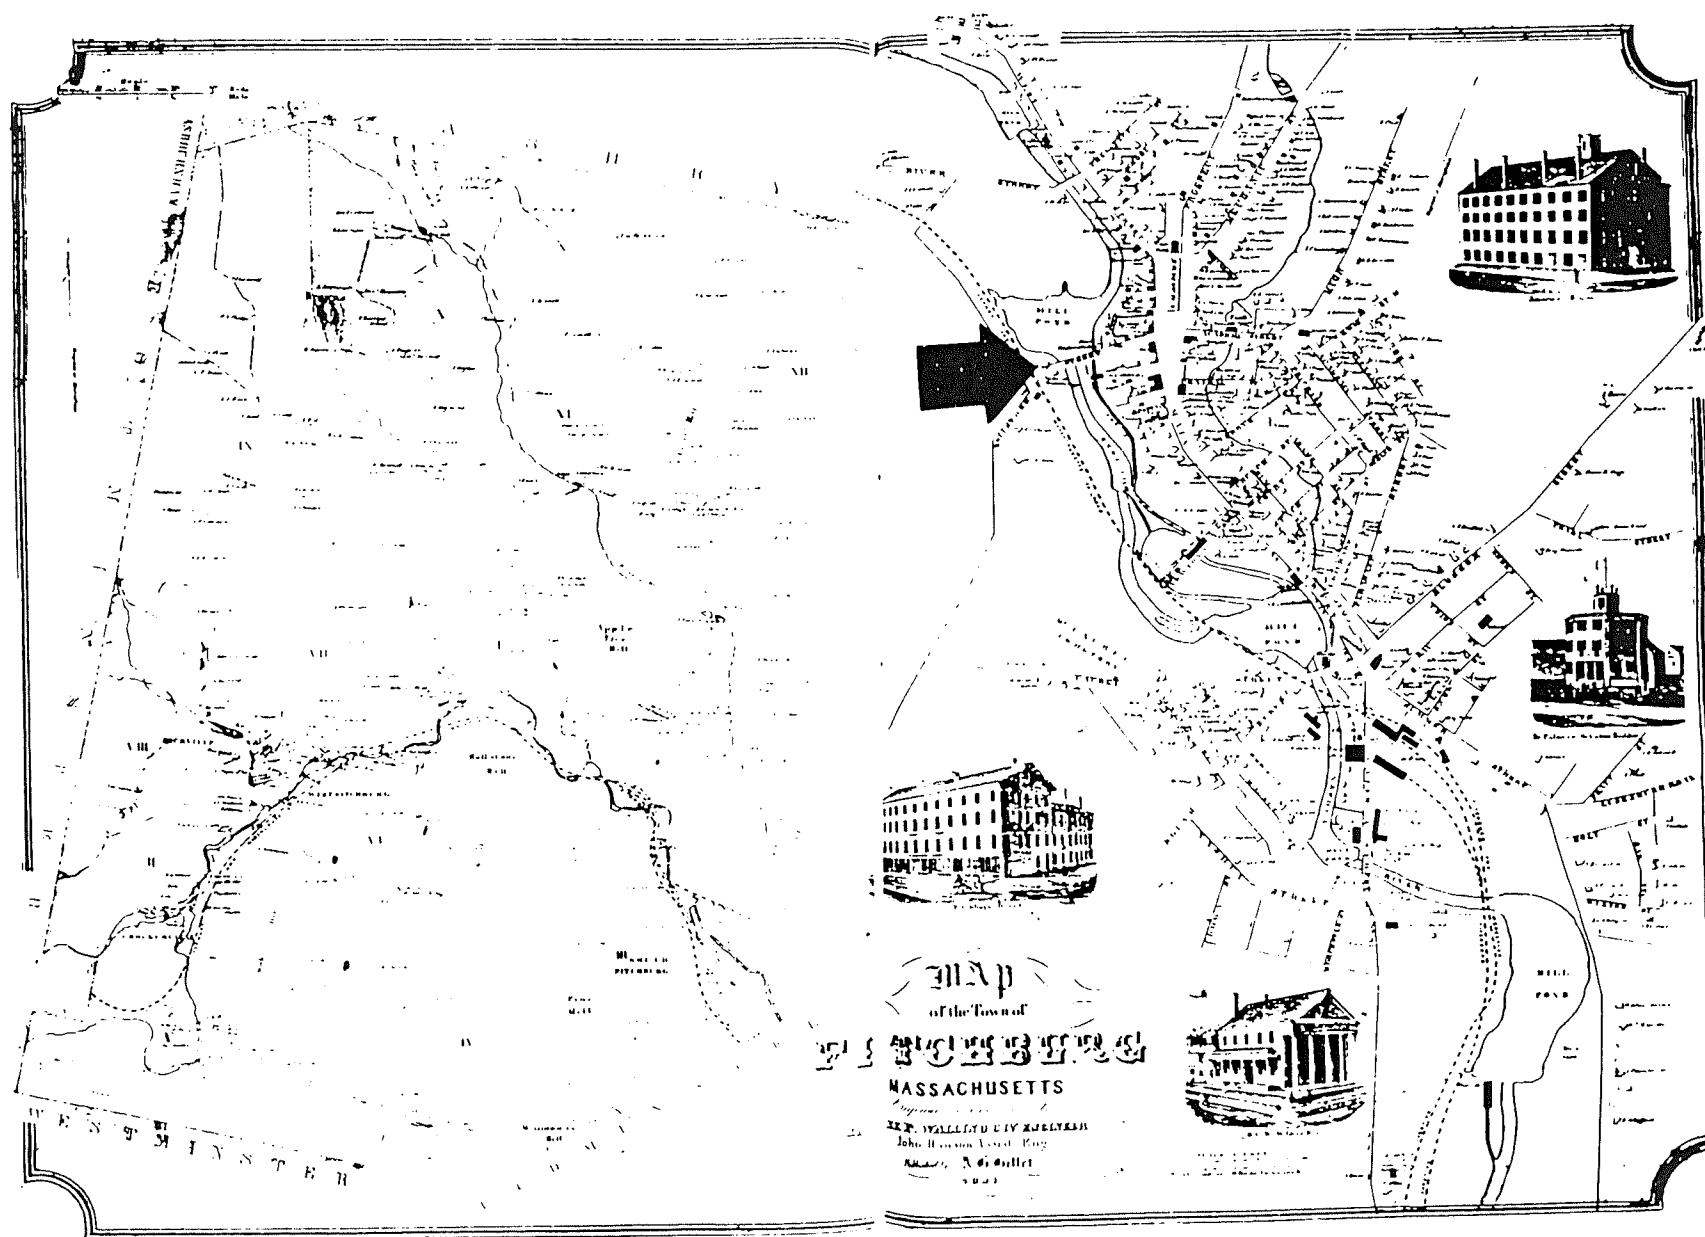

(LOWER) ROLLSTONE STREET BRIDGE
HAER No. MA-102
(page 9)

Figure 3. Map of Fitchburg, 1854, showing location of earlier bridge.



Figure 4.
View of Fitchburg from Rollstone Hill, showing Rollstone Street Bridge, 1888.
(Picturesque Fitchburg, 1888.)

(LOWER) ROLLSTONE STREET BRIDGE
HAER No. MA-102
(page 10)

(LOWER) ROLLSTONE STREET BRIDGE
HAER No. MA-102
(page 11)



Figure 5. Lower Rollstone Street Bridge, ca. early 1920s.
(Fitchburg Historical Society Collection.)

(LOWER) ROLLSTONE STREET BRIDGE
HAER No. MA-102
(page 12)

Rollstone Bridge Repairs To Be Finished In September


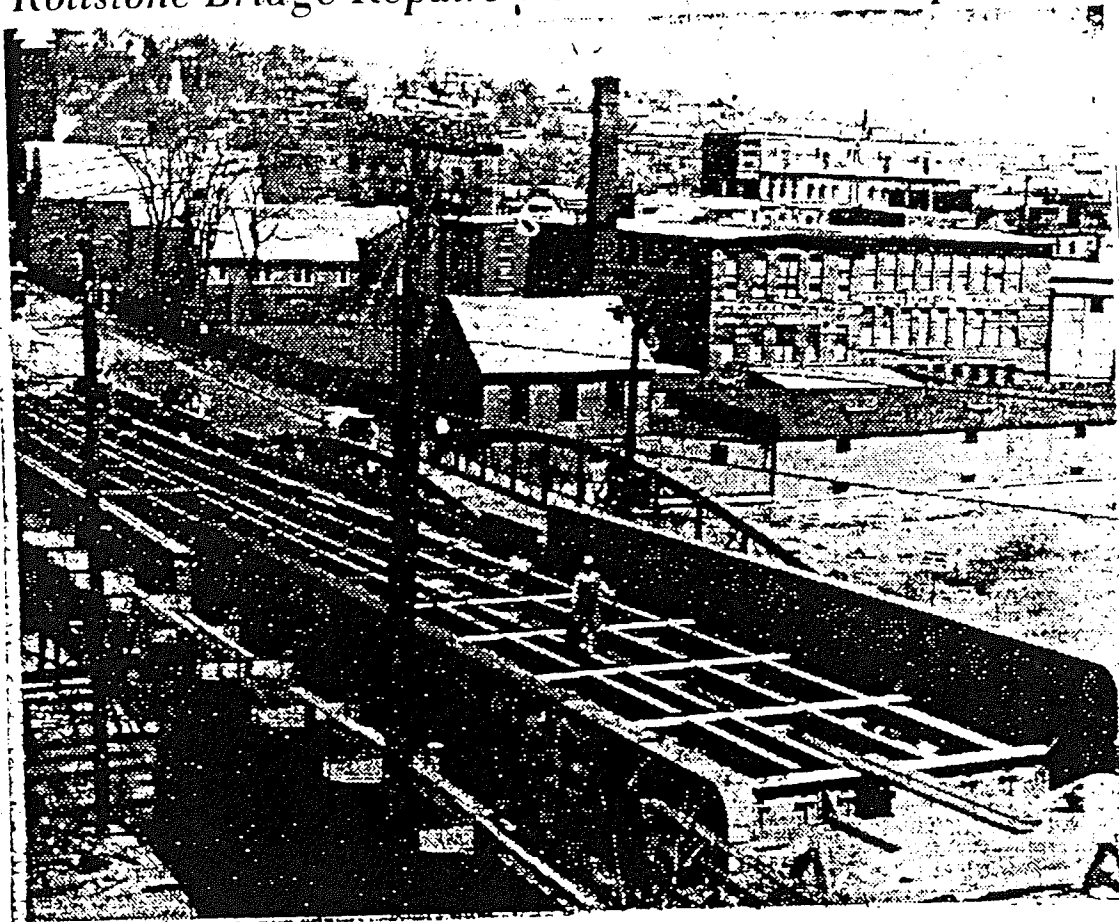


Figure 6. Upper Rollstone Street Bridge, 1950.
(Fitchburg Sentinel and Enterprise.)

(LOWER) ROLLSTONE STREET BRIDGE
HAER No. MA-102
(page 13)

PARKER'S PATENT WROUGHT-IRON TRUSS BRIDGE

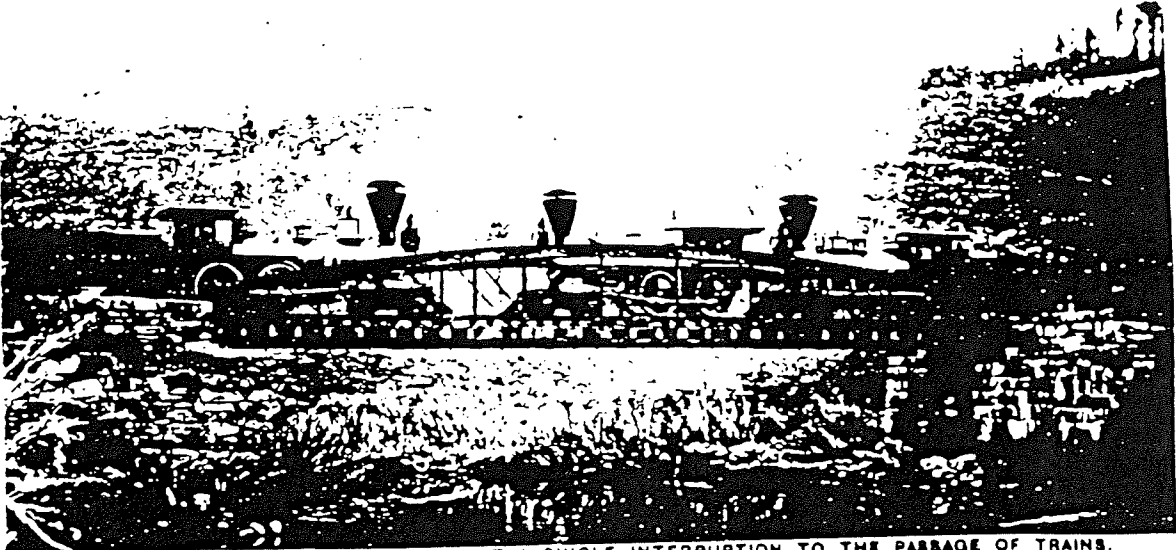

THIS BRIDGE WAS ERECTED WITHOUT A SINGLE INTERRUPTION TO THE PASSAGE OF TRAINS.

H. M. McINTOSH, Photographer, Northfield, Vt.

DEPTH OF TRUSS AT CENTRE, 10 FEET. DEFLECTION AT CENTRE, 12-16 IN.
CORNER, 3 QUARTER, 7-10
LENGTH OF PARKER, 104 FT. 6 IN. Returned to original number after removal of load.

Figure 7. Advertisement for National Bridge and Iron works.

National Bridge and Iron Works,
BLODGETT & CURRY, PROPRIETORS.
No. 15 STATE STREET, BOSTON, MASS.

Contractors for Building and Erecting Wrought-Iron Rail-
way and Highway Bridges and Roof Trusses.

CHAS. H. PARKER, Consulting Engineer. A. W. PARKER, Supt. of Works.

THE PARKER TRUSS WROUGHT-IRON RAILWAY BRIDGE, shown on the opposite side of this Card, was built and erected for the Vermont Central Railway Co., within four weeks after the burning of a wooden structure. It is situated on the main line, near Montpelier, Vt. It is 104 ft. 6 in. long, and is made to our standard for a single track, having an ultimate strength of six tons to the lineal foot of span, besides six times its own weight. The Bridge was tested Dec. 2, 1870, as shown, in the presence and under the direction of Hon. J. Gregory Smith, President, G. Merrill, Esq., General Superintendent, and other Railway officials, with three freight engines, showing results stated underneath.

United States Patent Office.

CHARLES H. PARKER, OF BOSTON, MASSACHUSETTS.

Letters Patent No. 100,155, dated February 27, 1870.

IMPROVED BRIDGE.

The Schedule referred to in Letters Patent and making part of the same.

To whom it may concern:

Be it known that I, CHARLES H. PARKER, civil engineer, of Boston, in the county of Suffolk and State of Massachusetts, have invented certain new and useful Improvements in the Construction of Bridges; and I hereby declare the following to be a full, clear, and exact description of the same, reference being had to the accompanying drawing, in which—

Figure 1 is a side elevation of a bridge embodying my invention.

Figures 2, 3, 4, and 5 are views representing in detail the construction and arrangement of the compression member.

Figures 6, 7, and 8 are like views of the skew-back or thrust-block.

Figure 9 is a view on an enlarged scale of the upper portion of one of the end panels of the structure.

The improvements in the construction of bridges which I desire to secure by Letters Patent are as follows:

First. The first portion of my invention relates to the construction of the end panels or bays of a truss.

In order to make a truss with a curved top member and straight bottom member, and sloping ends that shall be capable of being altered in length within certain limits, without changing the general proportions of the truss in other respects, I have designed the end panels, or in the following manner:

The truss is composed of a curved top member, a straight bottom member, and vertical posts or compression members A, with the usual system of longitudinal diagonal rods or braces.

With the vertical post it is one of the truss I combine the fractional length of the top member and a sloping end, as seen in the drawing, the curved top member being in whole or fractional length of the end panel or bay, as shown at G, H, I, J, K, L, and the balance of the length of this panel or bay being composed of the sloping end N, which is fitted or otherwise secured to the curved top member C and by its point of support at its other end in any suitable manner. The advantages of this plan are, that in practice if I wish to lengthen or shorten a given length of span within certain limits, I have only to shorten or lengthen the fractional top member of the end bay or panels, or increase or decrease the slope of the ends, without in any way altering or disturbing the patterns or dimensions or proportions of the vertical posts, or of that part of the truss between the end panels; and I am thus enabled in practice to make all patterns, measurements, and plans answer for different lengths of spans within certain limits.

Secondly. The second part of my invention relates to an improvement in the construction of a wrought-iron compression member, capable also of acting with equal efficiency as a tension member. The body of this member is formed of an I section-beam, A, either cast or built up of plates and angles.

The ends of the I-beam A are cut to receive the cast iron eyes B B, having shoulders c, which are fitted to and so as to rest on the ends of the flanges of the I-beam and projecting lips D D, which fit on each side of the web of the I-beam.

To join the eye to and virtually make it a part of the I-beam, I employ a strap of wrought iron, E, which passes around the outside and is recessed into the casting B at I, extending down over the lips D D to the web of the I-beam A, to which it is securely riveted.

The strap recessed into the casting, in connection with the projecting lips D D, prevents any moving of the casting from position.

The hole through the castings for a pin or rivet forms the means of connection of this member with the top and bottom members of a truss.

To form a connection with the bottom chord of a truss and the diagonals of the web, a further modification, shown in figs. 3, 3, and 4, is introduced into the lower eye. This consists in casting into the eye a slot, S, and cutting into the encircling strap E a similar slot, and then placing in this slot the eyes of the diagonals, so that by the common bolt all are held in place. By this construction I make a member which is effective in resisting both compression and tension, and is also capable of resisting effectively any lateral motion.

Thirdly. The third portion of my invention relates to an improved block or skew-back, which is used in the end panels or bays. The general form of this block is shown in figs. 6, 7, and 8. Along each side and around the end it is a recess, E, to receive the bar L, which passes completely around the thrust-block and terminates at its ends in eyes or any equivalent fastenings to assist in the chord bars of the bridge. To form the connection with the sloping end N of the arch or top member, the block projects into said end N. The thrust of this top member is received by shoulder O, cast upon the block and the upper edges of the encircling strap L. To give additional lateral stiffness, and to more thoroughly join to the block the top member, of which I introduce the plates P, if recessed into the block, and under the encircling strap L and under the side plates of the arch or top member, the whole being fastened together by bolts or rivets B B, or any equivalent passing through the encircling strap L, the plates P, into the block, and through the side plates of the arch.

(LOWER) ROLLSTONE STREET BRIDGE
HAER No. MA-102
(page 15)

100 15

2

top member G, the plate P, and into the block; and also with bolts X, or any equivalent fastening, through the top plate of the arch or top member into a block, thus binding the whole together securely. The advantage of this is, that the thrusts and pulls of the respective top and bottom members of a truss are resisted by the block, which receives from these members only strains of compression through the column of the encircling strap L; and the bolts, rivets, or any equivalent used to fasten said members to a block, are not called upon to resist the direct strains from the said top and bottom members.

What I claim as new, and desire to secure by letters Patent, is—

1. A truss having its vertical posts or compression members fractional lengths of the curved top member, and sloping ends combined in the end panels or bays, substantially in the manner and for the purpose specified.
2. A compression member of a truss, constructed in the manner and for the purposes specified.
3. The cast-iron eye or end of the compression member of a truss, constructed with lips to fit the

web of the beam, shoulders to fit upon the flanges of the beam, and a recess to receive the encircling strap E, in the manner and for the purposes specified.

4. The thrust-block or end-block, constructed in the manner and for the purposes specified.

5. The encircling bar or strap L, used in connection with the thrust-block, so as to meet the chord-lairs of the bridge, and at the same time to partially receive the thrust of the top member of the truss, in the manner and for the purposes specified.

6. The plate P, used in the manner and for the purposes specified.

7. The combination of the top and bottom members of a truss with the thrust-block, its encircling bar or strap, and the stiffening-plate P, under the arrangement shown and described.

In testimony whereof, I have signed my name to this specification before two subscribing witnesses.

CHAS. H. PARKER.

Witnesses:





THOMAS G. BAKER,
CADWALLADER CUMBY.

(LOWER) ROLLSTONE STREET BRIDGE
HAER No. MA-102
(page 16)

C.H. Parker,
Truss Bridge.

No. 100,185.

Patented Feb. 22, 1870

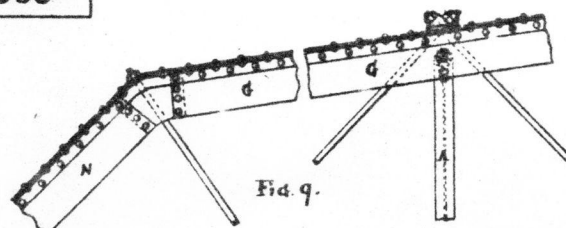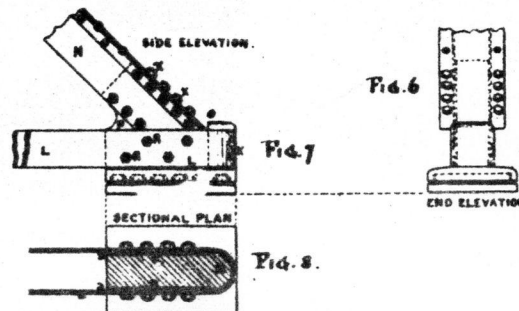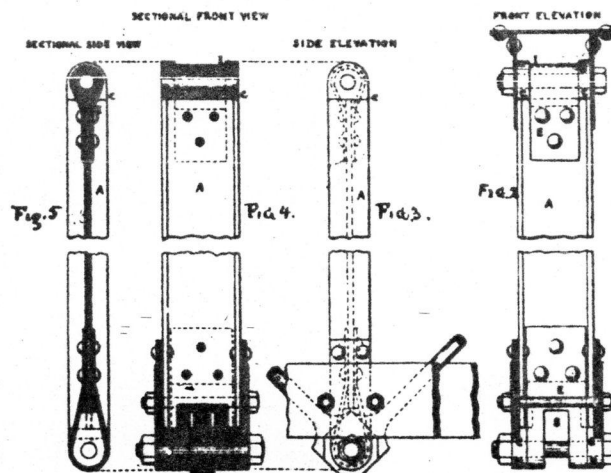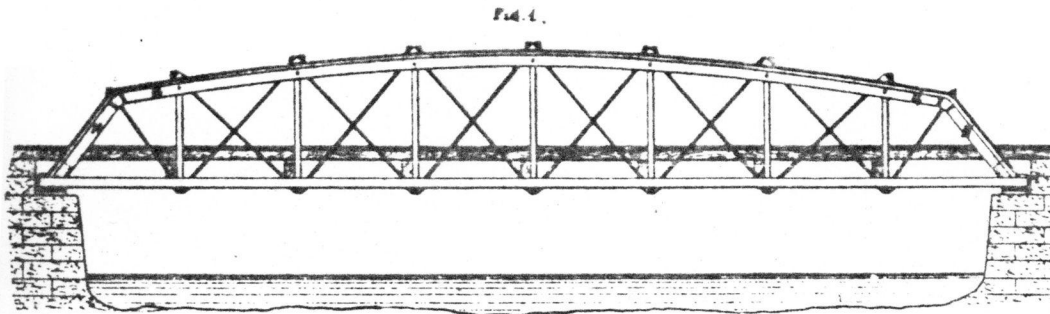

Charles H. Parker
by his attorney
A. F. Little

WITNESSES.

Wm. H. H. H. H.
Wm. H. H. H. H.

(LOWER) ROLLSTONE STREET BRIDGE
HAER No. MA-102
(page 17)

ENDNOTES

1. D. Hamilton Hurd, History of Worcester County, Massachusetts, vol 2. (Philadelphia, 1889), p.209.
2. Ibid, p.212.
3. Ibid, p.220.
4. Ibid, p.227.
5. Town of Fitchburg Annual Reports, 1849. (Stone & Harris was the predecessor of R.F. Hawkins Iron Works in Springfield. See HAER reports MA-96, MA-97, MA-108, MA-117, and MA-118, for more information on this company.)
6. Annual Reports, 1871.
7. The Fitchburg Sentinel, Fitchburg, Mass, October 9, 1869.
8. Annual Reports, 1871, p.15.
9. Ibid, pp.4-5.
10. The Fitchburg Sentinel, August 6, 1870.
11. Annual Reports, 1871, p.15.
12. Ibid, p.5.
13. Ibid, 1879, p.106.
14. According to Steve Roper, Massachusetts Department of Public Works Historic Bridge Specialist.
15. Carl W. Condit, American Building Art: The Nineteenth Century (New York, 1960), p.144.
16. Charles H. Parker, "U.S. Patent No. 100,185."
17. Dennis M. Zembala, Elm Street Bridge (Woodstock, Vermont, 1977), p.5.
18. "Charles H. Parker," memorial notice, Journal of the American Society of Mechanical Engineers, 1897, p.966.
19. Condit.
20. Ibid.

(LOWER) ROLLSTONE STREET BRIDGE
HAER No. MA-102
(page 18)

BIBLIOGRAPHY

Annual Reports of the Town of Fitchburg, 1850-1872.

Annual Reports of the City of Fitchburg, 1873-1930.

Batchelder, John. "Fitchburg, Mass., 1856." Boston: J.H. Bufford, Lithographer, 1856.

Beers, F.W. Map of Fitchburg, in Atlas of Worcester County, Massachusetts. New York: F.W. Beers and Co., 1871.

"Bridge No. F-4-13," Massachusetts Department of Public Works Bridge Files, Boston.

"Charles H. Parker," memorial notice, Journal of the American Society of Mechanical Engineers, 1897, pp.965-66.

Crane, Ellery Bicknell, editor. History of Worcester County, Massachusetts, 4 vols. New York/Chicago: Lewis Historical Publishing Co., 1907.

Darnell, Victor C. A Directory of American Bridge-Building Companies, 1840-1900, Occasional Publication No. 4. Washington, DC: Society for Industrial Archeology, 1984.

Downe, Levi, "A Map of Fitchburg, Mass., October 1830." Boston: Pendleton's Lithography, 1830.

Emerson, William A. Fitchburg, Massachusetts: Past and Present. Fitchburg, Massachusetts: Press of Blanchard & Brown, 1887.

Fire Insurance Maps of Fitchburg, Massachusetts. New York: Sanborn Map and Publishing Co., 1887.

Fitchburg of To-Day: A Typical New England City Described by Pen and Picture. Fitchburg, Massachusetts: The Sentinel Printing Co., 1894.

Fitchburg Sentinel. Fitchburg, Massachusetts, 1869-1870.

Galer, Gregory Jay. "The Boston Bridge Works and the Evolution of Truss Building Technology," unpublished thesis. Providence: Brown University, 1989.

Greenfield Gazette and Courier. Greenfield, Massachusetts, October 11, 1869.

Hurd, D. Hamilton. History of Worcester County, Massachusetts, 2 vols. Philadelphia: J.W. Lewis and Co., 1889.

(LOWER) ROLLSTONE STREET BRIDGE
HAER No. MA-102
(page 19)

Kirkpatrick, Doris. The City and the River. Fitchburg, Massachusetts:
Fitchburg Historical Society, 1971.

Map of Fitchburg, Massachusetts. Troy, New York: L.R. Burleigh, Delineator
and Publisher, 1882.

Marvin, A.B., and others. History of Worcester County, Massachusetts, vol. 2.
Boston: C.F. Jewett and Co., 1879.

Nason, Elias. A Gazetteer of the State of Massachusetts, revised and enlarged
by George J. Varney. Boston: B.B. Russell, 1890.

Parker, Charles H. "U.S. Patent No. 100,185." February 22, 1870.

Picturesque Fitchburg. Gardner, Massachusetts: W.P. Allen, 1888.

"The Shocking Story of the Area's Bridges," Fitchburg Sentinel and Enterprise,
September 9, 1983.

Stone, Orra L. History of Massachusetts Industries: Their Inception, Growth
and Success. Boston/Chicago: The S.J. Clarke Publishing Co., 1930.

Torrey, Rufus C. History of the Town of Fitchburg, Massachusetts. Fitchburg,
Massachusetts: Fitchburg Centennial Committee, 1865.

Walling, H.F. "Map of the Town of Fitchburg, Massachusetts." Published by
A.G. Gillet, 1854.

Whitefield, E. Bird's-eye-view map, "View of Fitchburg, Mass., From Rollstone
Hill, 1870." Boston: J.H. Bufford, printer.

Zembala, Dennis M. Elm Street Bridge. Woodstock, Vermont: Woodstock National
Historic District Commission, 1977.

HISTORIC AMERICAN ENGINEERING RECORD

INDEX TO PHOTOGRAPHS

(Lower) Rollstone Street Bridge
Spanning the Nashua River on Rollstone Street
Fitchburg
Worcester County
Massachusetts

HAER No. MA-102

Martin Stupich, Photographer, Summer 1990

- | | |
|-----------|--|
| MA-102-1 | General view from upper roadway, looking northeast |
| MA-102-2 | General view from upper roadway, looking south |
| MA-102-3 | Detail of east upper chord from north portal, showing cast iron skewbacks and ornamental bollards, looking southeast |
| MA-102-4 | Detail of west upper chord from roadway, showing truss geometry and connections (railing of lower bridge was originally located on the outer side of the truss), looking north |
| MA-102-5 | Detail of west truss from upper bridge, looking downward and southeast |
| MA-102-6 | Detail of west truss from upper bridge, showing truss geometry, looking downward and northeast |
| MA-102-7 | Detail of southwest corner of span from upper bridge, showing upper chord rivets and castings, looking downward and southeast |
| MA-102-8 | General view of truss geometry at center of span from lower parking lot, looking northwest |
| MA-102-9 | East elevation of span from lower parking lot, looking northwest |
| MA-102-10 | Detail of upper chord connection with both rivets and nuts, looking northeast from deck |
| MA-102-11 | Detail of upper chord connection with rivets only, looking east from deck |


HISTORIC AMERICAN ENGINEERING RECORD
SEE INDEX TO PHOTOGRAPHS FOR CAPTIONS

HAER No. MA-102-1



HISTORIC AMERICAN ENGINEERING RECORD
SEE INDEX TO PHOTOGRAPHS FOR CAPTIONS

HAER No. MA-102-2

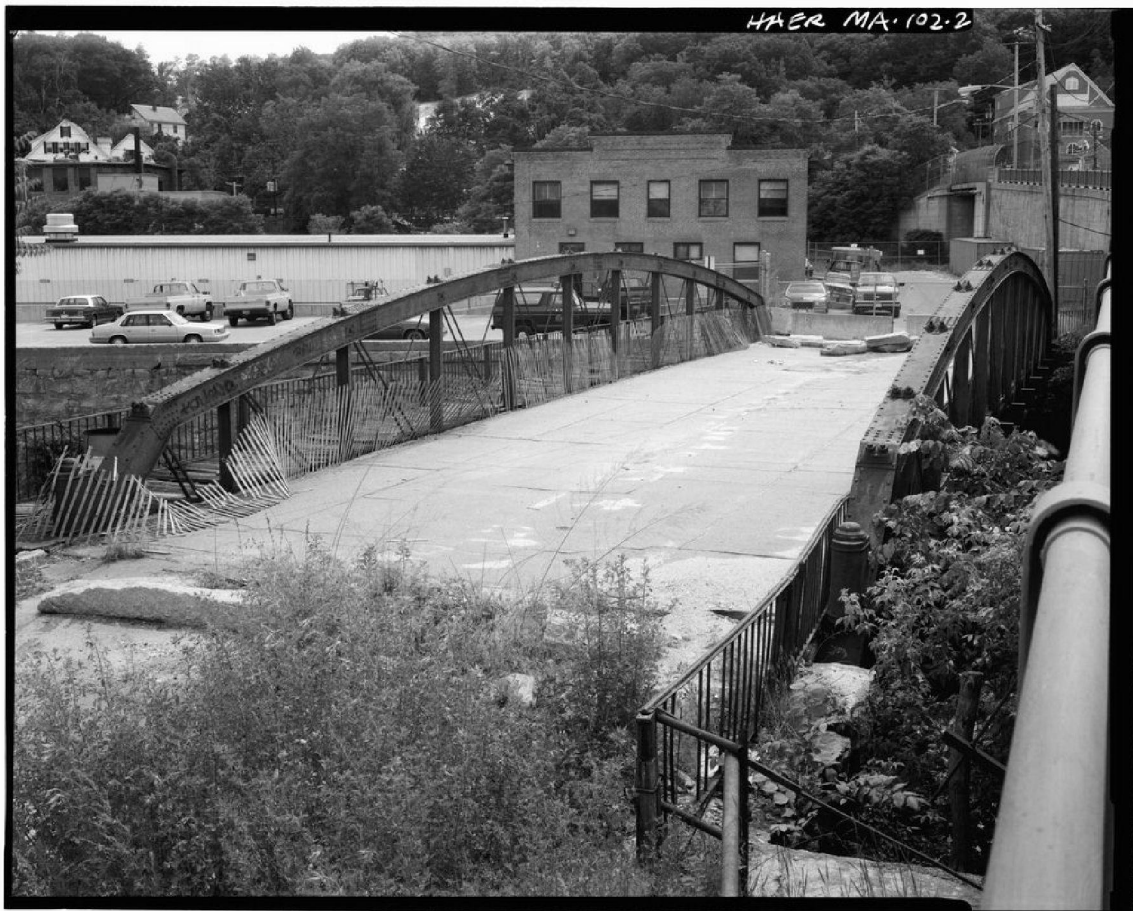

HISTORIC AMERICAN ENGINEERING RECORD
SEE INDEX TO PHOTOGRAPHS FOR CAPTIONS

HAER No. MA-102-3



HISTORIC AMERICAN ENGINEERING RECORD
SEE INDEX TO PHOTOGRAPHS FOR CAPTIONS

HAER No. MA-102-4



HISTORIC AMERICAN ENGINEERING RECORD
SEE INDEX TO PHOTOGRAPHS FOR CAPTIONS

HAER No. MA-102-5



HISTORIC AMERICAN ENGINEERING RECORD
SEE INDEX TO PHOTOGRAPHS FOR CAPTIONS

HAER No. MA-102-6



HISTORIC AMERICAN ENGINEERING RECORD
SEE INDEX TO PHOTOGRAPHS FOR CAPTIONS

HAER No. MA-102-7



HISTORIC AMERICAN ENGINEERING RECORD
SEE INDEX TO PHOTOGRAPHS FOR CAPTIONS

HAER No. MA-102-8



HISTORIC AMERICAN ENGINEERING RECORD
SEE INDEX TO PHOTOGRAPHS FOR CAPTIONS

HAER No. MA-102-9



HISTORIC AMERICAN ENGINEERING RECORD
SEE INDEX TO PHOTOGRAPHS FOR CAPTIONS

HAER No. MA-102-10



FIT.931

HISTORIC AMERICAN ENGINEERING RECORD
SEE INDEX TO PHOTOGRAPHS FOR CAPTIONS

HAER No. MA-102-11

